




**presents . . . THE DUAL 50**

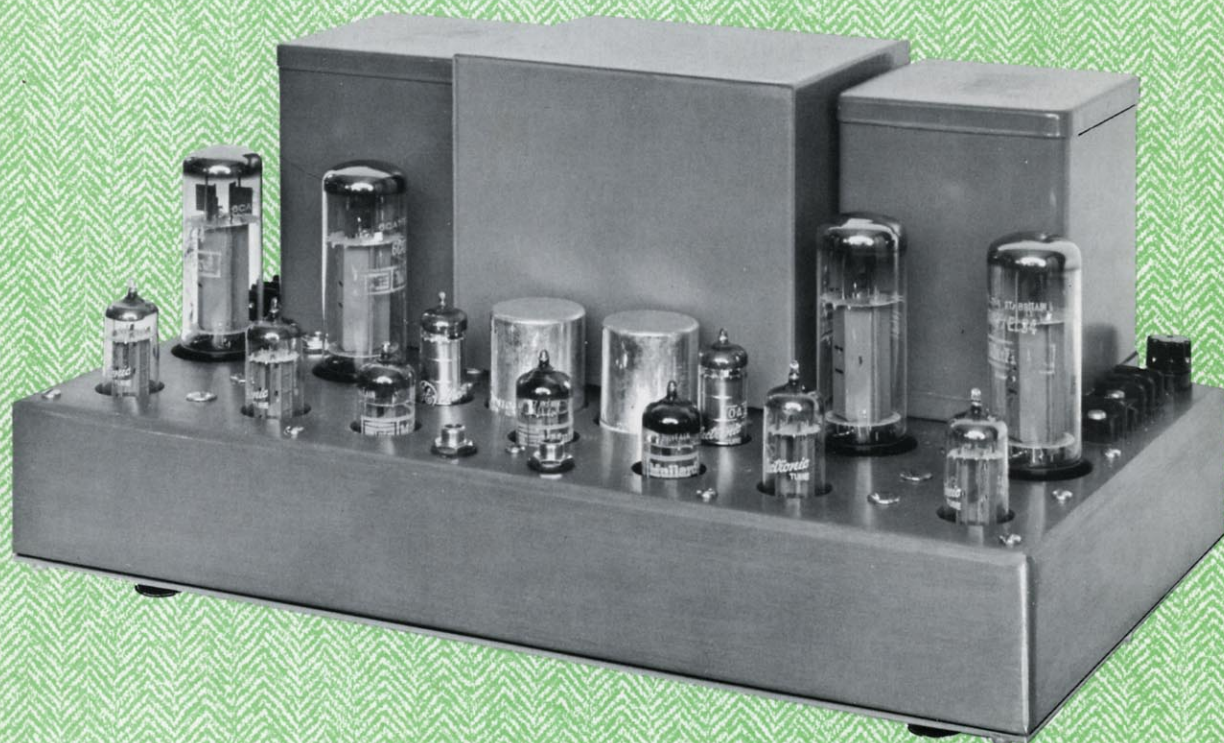

**perhaps  
the world's lowest price . . .  
HIGH-DEFINITION  
AMPLIFIER!**

**ELECTRONIC INDUSTRIES DIV. — PEPLAE INC. — MINNEAPOLIS, MINNESOTA**



## specification

(all tests – both channels operating)

Frequency response:	$\pm .2$ dB 30 Hz to 15 KHz at 1 watt $\pm 1$ dB 30 Hz to 15 KHz at 50 watts
Sine Wave Power:	At least 50 watts RMS 30 Hz to 15 KHz
Harmonic Distortion:	Less than .25% at 1 KHz at 50 watts
Hum and noise:	At least 85 dB below rated output
Input Sensitivity:	.85 volts RMS for rated output
Impulse Distortion:	Essentially none – 30 Hz to 15 KHz
Permissible Loads:	Open circuit, resistive, capacitive, inductive, or any combination, series or parallel
Output Impedances:	4, 8, 16 ohms
Load Regulation:	From 16 ohm resistive load to open circuit less than 1 dB change at 1 KHz
Size:	16" x 10" x 7"
Weight:	50 lbs.